

ALTAS KDS

Kitchen Display System



Professional KDS Hardware

Simplify communication between servers and kitchen staff. Your servers ring up orders in Jassway Altas Kitchen Display Hardware immediately brings them right in front of your kitchen staff eyes, no time wasted.

Improved POS Technology Yields Improved Order Efficiency

Our team of advanced system designers have created the world's most modern interpretation of a functional touchscreen-based kitchen management system hardware, helping you achieve unprecedented levels of kitchen productivity. In the design of the product, **the whole heat sink is designed on the back plate through bold ideas**, and it can also be sealed by custom silica gel to achieve the waterproof level of the whole machine, which is used in a more demanding kitchen environment.

HARDWARE DESIGN



The main board compartment on the back is a whole metal plate design, and the whole plate heat dissipation design



Power button on the top with seal design



Side design, inclined design of main board compartment, and with more design sense



21.5inch Touch Screen
75*75mm VESA Mount

ALTAS KDS

Kitchen Display System




SPECIFICATIONS


Model No.	ALT215KDS-W	ALT215KDS-A
SYSTEM		
Processor	Intel Celeron J1900 Quad-Core, Up to 2.42 GHz Intel Celeron J4125 Quad-Core, Up to 2.70 GHz Intel Celeron J6412 Quad-Core, Up to 2.60 GHz Intel Core i3/i5 4th, 5th, 6th, 8th, 10th, 11th, 12th High Performance CPU	Rockchip RK3288, Quad-core Cortex-A17 up to 1.8GHz Rockchip RK3568, Quad-core Cortex-A17 up to 1.8GHz
Memory	4GB Standard, up to 8GB/16GB/32GB	2GB/4GB
Storage	64GB standard, up to 512GB	16GB/32GB/64GB eMMC
OS	Windows 7/ 10/ 11, POS Ready7, Linux	Andriod 8.1 / 11
DISPLAY		
Type	21.5 inch TFT LED Backlight	
Resolution	1920*1080	
Brightness	16:9	
Surface Treatment	250 nits	
Touchscreen	Projective Capacitive Touch Screen / Non Touch Display	
INTERFACES		
Display	1*VGA or 1*VGA+1*HDMI	1*HDMI
USB	3*USB2.0, 1*USB3.0	4*USB2.0
Serial	2*COM	2*RS232
LAN	1*RJ45	1*RJ45
Audio	1*Mic-in, 1*Line-out	1*Mic-in
SD Socket	/	Up to 64GB
Power DC-IN	Input AC 100~240V/50~60hz, Output DC12V/7.5A	
PHYSICAL & ENVIRONMENTAL		
Operating Temperature	Operating 0~60°	
Storage Temperature	Storage -35°~75°	
Cooling	Fanless or with CPU Fan	
Dimensions	(W×H×D) 535x325x70(MM)	
Packing Dimensions	(W×H×D) 620*440*230(MM) With Wooden Box	
Net Weight	6.5KG	
Packing Weight	11.5KG With Wooden Box	
Certification	CE,FCC,RoHS	
Color	Black	
OPTIONS & PERIPHERALS		
WIFI	Mini PCIe for Wireless LAN(Optional)	IEEE 802.11 b/g/n
Bluetooth	Bluetooth 4.0 protocol(option)	
Speaker	Built-in 3W speaker	
VESA	75x75 mm	

*Specification may change without prior notice.


DIMENSION

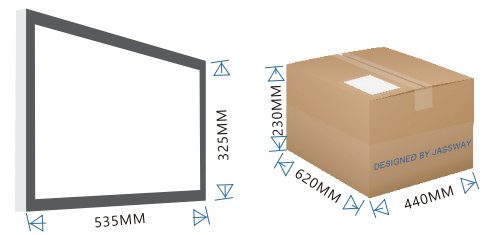

FEATURES



Exquisite performance due to the advanced chip




21.5 inch touch screen with 1920*1080



Whole metal plate heat dissipation design



Power button on the top with seal design



IP65-rated front weatherproof structure



75*75 VESA Mount